



The LMB530 square bollard, featuring a luminous center tube surrounded by outer ribs, is perfect for enhancing various outdoor spaces. It's an ideal architectural element for decorating pathways, gardens, sidewalks, and building entrances.

# BOLLARD LMB530

### Bollard Construction;

The LMB530 bollard features all extruded aluminum parts mechanically attached without any visible fasteners with internally reinforced steel structure. This construction ensures durability and stability against impacts.

Size: 5.875" X 5.875"

Heights: 20", 36", 42"

### Mounting Details;

Base Plate: Galvanized Steel

Bolt circle Diameter: 4.00"

Anchor Bolts: 4x 3/8" 10" long Galv. steel

### Lighting Specifications

Lumens: 800-3000ms. (Delivered)

CCT: 3000-5000K CRI> 70 / RGBW

Lighting Distribution: IES3, IES5

### Electrical specifications;

Power Source: LED Driver (Electronic HPF)

Voltage: 120-277V

SURGE SUP: 10kVA

Power: 15W, 40W

### Lighting Controls;

0-10 Dimming

### Emergency Power;

500 Lumens (Delivered) for 90 minutes (Integral Battery Pack), Optional

### Chromaticity;

High output LEDs come standard 3000K, 4000K and 5000k (+/- 300K) minimum nominal 70 CRI. Additional CCT emitters are available upon request.

### Finish;


Housing is finished with 5 stages of pre-paint procedure prior to Electrostatically Thermoset Powder-Coat application. Standard colors are Bacardi Black, Dk Bronze, Platinum Grey, Galactic Green, and Snow White.

### Certification;

ETL certificate to UL 1598 / CSA C22.2 No 250.0

### Warranty;

LMB530 Bollard comes with a 5 year Limited warranty on all electronic and electrical components

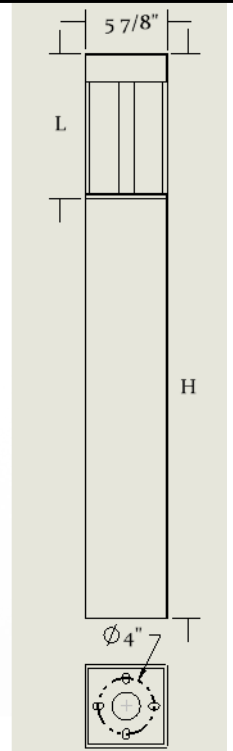

COMPLY TO

UL1598 / CSA C22.2 No 250.0 IP66 IK10

WARRANTY: 5 YEARS

## CONFIGURATION

LMB570-36-12	T3	3K	L1	LV	PC	DS	GG
Model	Light Distribution	CCT	Lumens (Initial)	Input Voltage	Lighting Control	Options	Finish
LMB560-20-12	T3-IES3*	3K-3000K	H1 - 800Lm	LV-120V	LD -0-10V DIM	EP-Emergency Power	BB-Bacardi Black
LMB560-36-12, 24	T5-IES5	4K-4000K	H2 - 1600Lm	UV- 120-277V	PC- Photocell	HSS-House Side	DB-Dk Bronze
LMB560-42-12,24,36		5K-5000K	H3 - 3000Lm	HV-347		Shield for IES3	PG-Platinum Grey
		C4 - RGBW	H3 for L>36 H2 for L> 24				GG -Galactic Green SW-Snow white