



The LMB560 bollard high lighting output makes it ideal for illuminating pathways or specific areas. This versatility can be particularly useful in commercial or public spaces where both pathway and area lighting are needed.

# BOLLARD LMB560

### Bollard Construction;

Cast aluminum base cover and top attached to extruded aluminum core internally reinforced with steel rods to withstand lateral impact loads.

Size: 8.50" x 8.50"

Height: 24"- 96"

Customizable bollard head height

### Mounting Details;

Base Plate: Galvanized Steel

Bolt circle Diameter: 5.50 "

Anchor Bolts: 4 x 3/8" Dia x 10" long Galv. steel

### Lighting Specifications

Lumens: 2000-5000 Alms. (Delivered)

CCT: 3000-5000K CRI> 70

Lighting Distribution: IES2, IES3, IES4, IES5

### Electrical specifications;

Power Source: LED Driver (Electronic HPF)

Voltage: 120-277, and 347-480V

SURGE SUP: 20kVA

Power: 25-60W

### Lighting Controls;

0-10 Dimming

### Emergency Power;

500 Lumens (Delivered) for 90 minutes  
(Integral Battery Pack)

### Chromaticity;

High output LEDs come standard 3000K & 4000K (+/- 300K) minimum nominal 70 CRI. Additional CCT emitters are available upon request.

### Finish;


Housing is finished with 5 stages of pre-paint procedure prior to Electrostatically Thermoset Powder-Coat application. Standard colors are Bacardi Black, Dk Bronze, Platinum Grey, Galactic Green, and Snow White.

### Certification;

ETL certificate to UL 1598 / CSA C22.2 No 250.0

### Warranty;

LMB560 Bollard comes with a 5 year Limited warranty on all electronic and electrical components

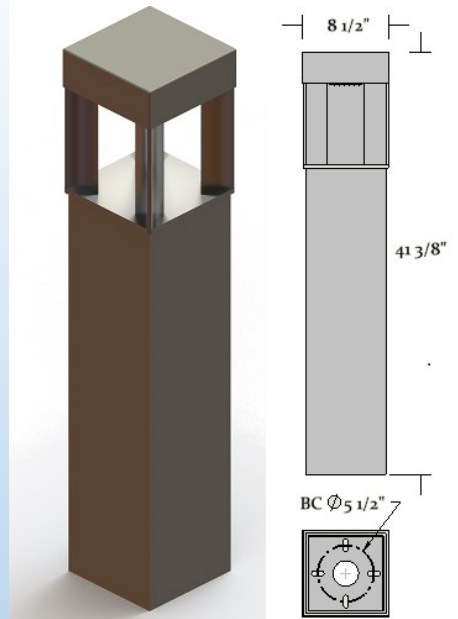

**COMPLY TO**  
**UL1598 / CSA C22.2 No**  
**250.0**  
**WARRANTY: 5 YEARS**

## CONFIGURATION

LMB560-36	T3	3K	L1	LV	PC	DS	GG
Model	Light Distribution	CCT	Lumens (Initial)	Input Voltage	Lighting Control	Options	Finish
LMB560-24	T2-IES 2	3K-3000K	L1 - 2000Lm	LV-120V	LD -0-10V DIM	EP-Emergency Power	BB-Bacardi Black
LMB560-36	T3-IES3	4K-4000K	L2 - 3000Lm	UV- 120-277V	PC- Photocell		DB-Dk Bronze
LMB560-42	T3-IES4	5K-5000K	L3- 4000lm	HV- 347 V	DM-DMX		PG-Platinum Grey
LMB560-60	T5-IES 5		L4 - 5000Lm				GG-Galactic Green
LMB560-96							SW-Snow white